



BV2HD SERİSİ HİDROLİK 2 YOLLU KÜRESEL VANALAR (KIRICILAR İÇİN)

BV2HD Serisi Hidrolik 2 Yollu Küresel Vanalar, yüksek debili akışkanların ve hidrolik şokların verebileceği zararlara karşı mükemmel dayanıklılıkları sayesinde **kırıcılarda** ve ağır iş makinelerinde vibrasyonlu yüksek basınç uygulamalarında kullanılmaktadır.



Gövde Malzemesi
Küre Malzemesi
Vida Ölçüsü
Küre Yataklaması
Sızdırmazlık
Çalışma Sıcaklığı
Kaplama
Özel Hallerde
Kullanım Alanı

Yüksek Nitelikli Dövme Çelik
Sert Krom Kaplı Çelik
BSP (İsteğe Bağlı: NPT, Metrik)
Delrin (POM)
Nitril O-ring (NBR)
-30 °C ile +110 °C
Galvaniz (Chrome III pasivasyon)
VİTON
Kırıcılar, Kazı makineleri, vinçler,




BV2HD SERIES HYDRAULIC 2-WAY BALL VALVES (FOR HAMMERS & BREAKERS)


BV2HD Series Hydraulic 2 Way Ball Valves' great resistance to pressure peaks prevent damage from high velocity fluid and hydraulic shocks, allow applications involving high pressure impulses for **hammers & breakers**.

Body Material
Ball Material
Thread Size
Ball Seats
Sealing
Working Temperature
Plating
Upon Request
Applications

High grade forged steel
Hard chrome coated carbon steel.
BSP (Upon Request: NPT, Metric)
Delrin (POM)
Nitrile O-ring (NBR)
-30 °C and +110 °C
Zinc Plating (Cr III Passivation)
VITON
Brakers & Hammers, Drilling Machines, Cranes, Excavators


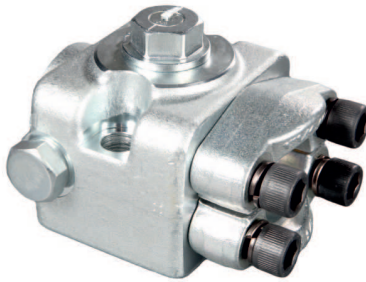


Tek Flanşlı / Single Flange

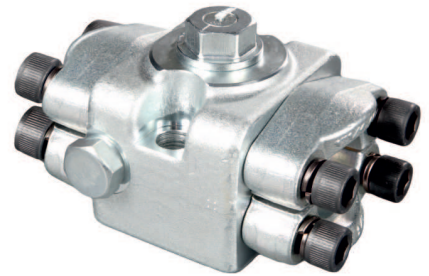

Çift Flanşlı / Double Flange



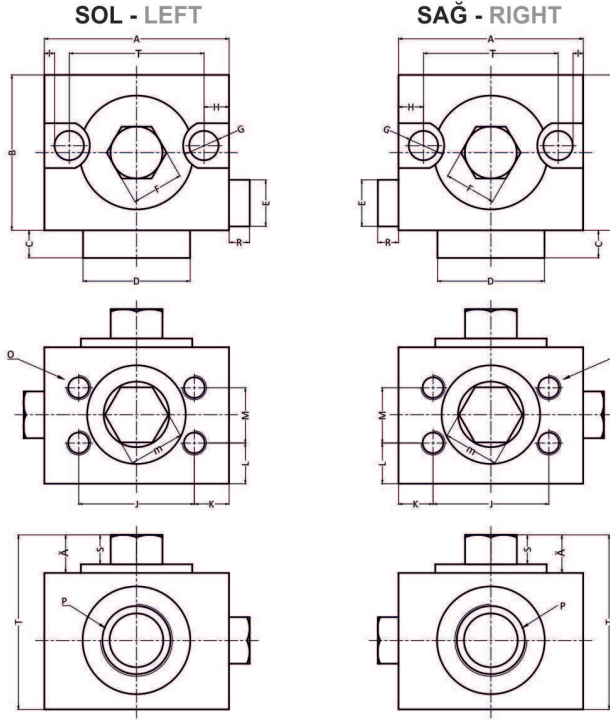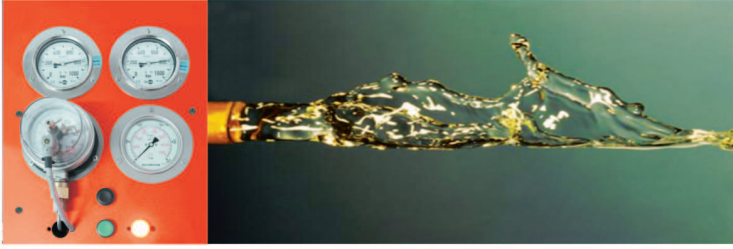

Teknik Özellikler Technical Specifications

SOL - LEFT

Kod (Code)	Vida Ölçüsü (Thread Size)	Çalışma Basıncı (Working Pressure-Bar)	Ölçüler - mm (Dimensions) - mm																				
			A	B	C	D	E	F	G	H	I	İ	J	K	L	M	O	Ö	P	R	S	Ş	T
BV2HDSFG34N-L	3/4" BSP	460	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDDFG34N-L	3/4" BSP	460	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDSFG1N-L	1" BSP	440	82	85	10	51	27	30	13	9	2.50	64	52.50	15.25	17.25	26.50	M10x1.5	25	1" BSP	12	12.50	16	81
BV2HDFG1N-L	1" BSP	440	82	85	10	51	27	30	13	9	2.50	64	52.50	15.25	17.25	26.50	M10x1.5	25	1" BSP	12	12.50	16	81
BV2HDSFG114N-L	1-1/4" BSP	420	107	95	10	62	27	30	17	14.50	6	78	67	20	23.50	32	M14x2	32	11/4" BSP	12	17	22	79
BV2HDDFG114N-L	1-1/4" BSP	420	107	95	10	62	27	30	17	14.50	6	78	67	20	23.50	32	M14x2	32	11/4" BSP	12	17	22	79
BV2HDSFG112N-L	1-1/2" BSP	400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDDFG112N-L	1-1/2" BSP	400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

SAĞ - RIGHT

Kod (Code)	Vida Ölçüsü (Thread Size)	Çalışma Basıncı (Working Pressure-Bar)	Ölçüler - mm (Dimensions) - mm																				
			A	B	C	D	E	F	G	H	I	İ	J	K	L	M	O	Ö	P	R	S	Ş	T
BV2HDSFG34N-R	3/4" BSP	460	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDDFG34N-R	3/4" BSP	460	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDSFG1N-R	1" BSP	440	82	85	10	51	27	30	13	9	2.50	64	52.50	15.25	17.25	26.50	M10x1.5	25	1" BSP	12	12.50	16	81
BV2HDFG1N-R	1" BSP	440	82	85	10	51	27	30	13	9	2.50	64	52.50	15.25	17.25	26.50	M10x1.5	25	1" BSP	12	12.50	16	81
BV2HDSFG114N-R	1-1/4" BSP	420	107	95	10	62	27	30	17	14.50	6	78	67	20	23.50	32	M14x2	32	11/4" BSP	12	17	22	79
BV2HDDFG114N-R	1-1/4" BSP	420	107	95	10	62	27	30	17	14.50	6	78	67	20	23.50	32	M14x2	32	11/4" BSP	12	17	22	79
BV2HDSFG112N-R	1-1/2" BSP	400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BV2HDDFG112N-R	1-1/2" BSP	400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

