



CRS SERİSİ HİDROLİK YÜKSEK BASINÇ TEK ETKİLİ SİLİNDİRLER



- Dar alanlarda kullanıma uygun hafif ve düşük yükseklikte dizayn.
- Isıl işlemle sertleştirilmiş silindir ve piston
- Pasa karşı dayanıklı ve uzun ömürlü boya
- Tek etkili
- Yay çekmeli
- İlave başlık gerektirmeyen yivli piston başlığı
- Kirliliği önleyen ve silindirin ömrünü arttıran toz keçesi.
- Tüm modellerde C1000N38FN 3/8" NPTF 1000 Bar ultra yüksek basınç dişi otomatik rekor ve toz kapağı



CRS SERIES HYDRAULIC HIGH PRESSURE SINGLE ACTING CYLINDERS

- Lightweight, low profile design for use in confined spaces
- Hardened steel cylinder and piston
- Corrosion resistant & durable painting
- Single-acting
- Spring return
- Grooved piston end requires no saddle
- Piston wiper reduces contamination and extends cylinder life
- C1000N38FN 3/8" NPTF 1000 Bar ultra high pressure coupler and dust cap included on all models



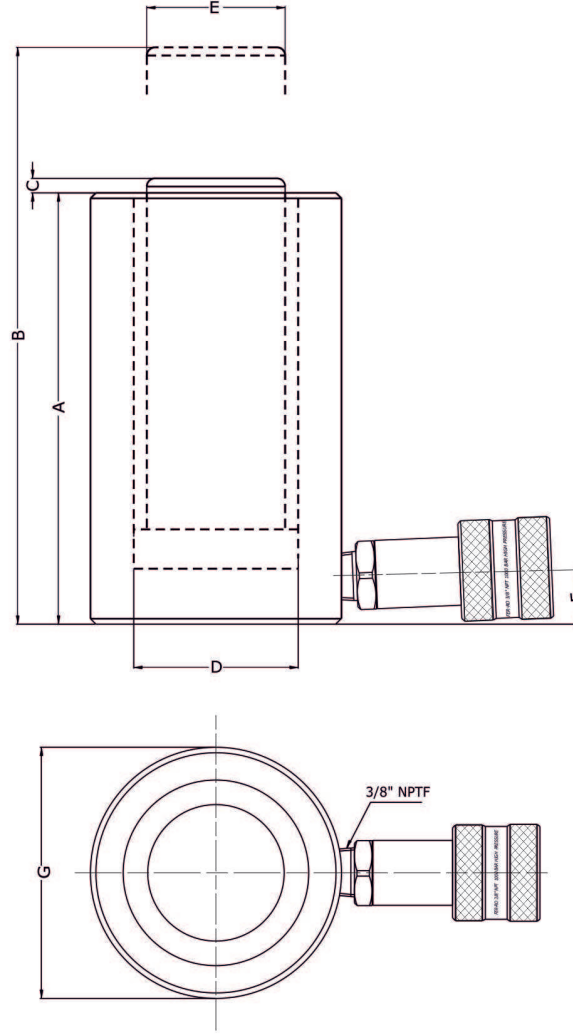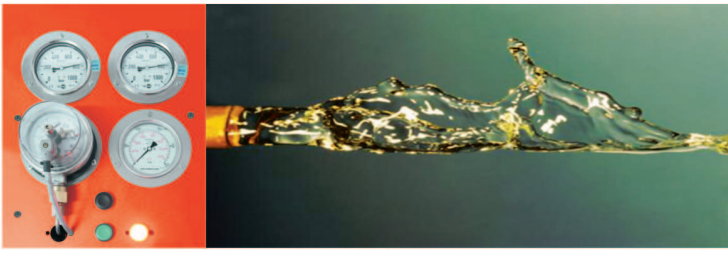

Teknik Özellikler Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Kapasite (Capacity) Ton	Strok (Stroke) mm	Ölçüler - mm (Dimensions) - mm						
				A	B	C	D	E	F	G
CRS20-45	700	20 TON	45	95	144	4	60	50	14	92
CRS20-102	700	20 TON	102	158	264	4	60	50	14	92
CRS20-162	700	20 TON	162	218	384	4	60	50	14	92

